


The 3000-12L is designed for blast hole rigs and can be remotely operated from cab. Once inflated, the unit will form a leak-proof seat on the ground providing a very effective means of diverting all drill cuttings to a cyclone or splitter for sampling. The 3000-12L utilizes a 5010 Wiper Rubber, which is a one-piece rubber designed to allow the passage of the drill bit and to also seal drill steel.

The flow tube or outlet can be manually rotated to 360° so drill cuttings can be directed to desired location. The 3000-12L can be utilized on terrain that is up to 20° out of level.

The 3000-12L comes complete with Control Unit, Primary Inline Air Regulator, Air Lines, and Universal Brackets to be welded to bottom side of break-out table. With brackets in place, Diverter will be firmly affixed to rig, but still offers ease of removal by simply removing two clevis pins. Diverter is then simply lowered to the ground under its own power.

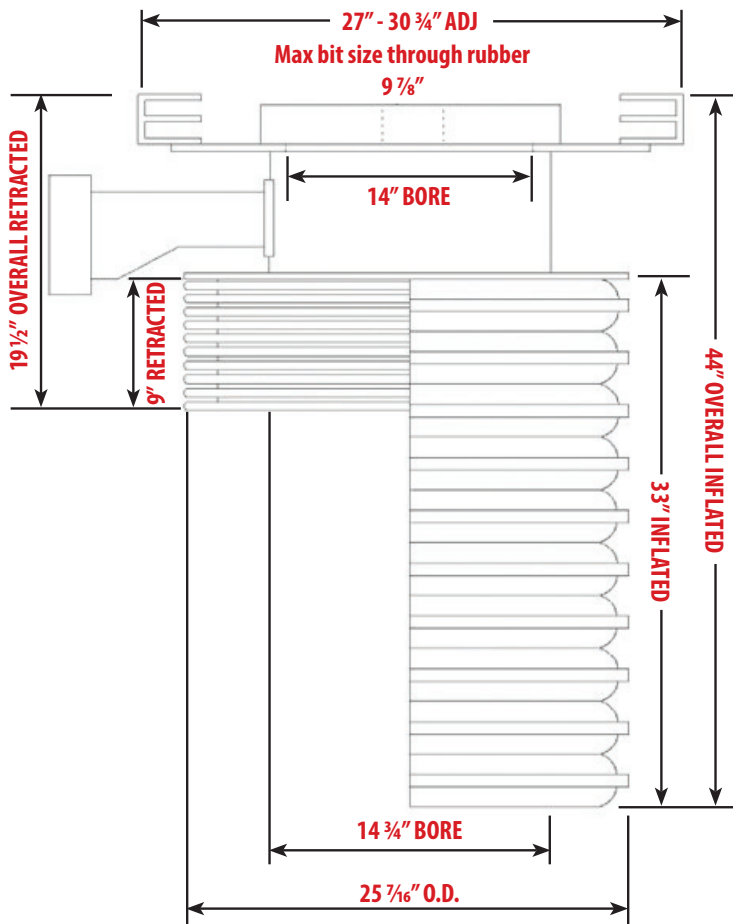

Outlet Options

- Standard 6" NPT Outlet
- Optional 8" NPT Outlet (Note: This option adds 1 1/2" to overall height)